



Honeywell Lynx Touch 5100 System



Quick Reference Guide

ARMING AND DISARMING YOUR SYSTEM

1

From the HOME screen, touch SECURITY icon.



2

At the SECURITY screen, touch the icon on the keypad for the desired setting:

ARM STAY ICON: Arms perimeter, with no motion, with entry/exit delay

ARM AWAY ICON: Arms entire system, with motion, and entry/exit delay

For no entry/exit delay: Press the DELAY or INSTANT icon on the bottom of the SECURITY screen, (toggles on and off) then press STAY.




3

Enter your 4-digit code, system will arm.



4


To disarm system, touch the DISARM icon, then enter your code.

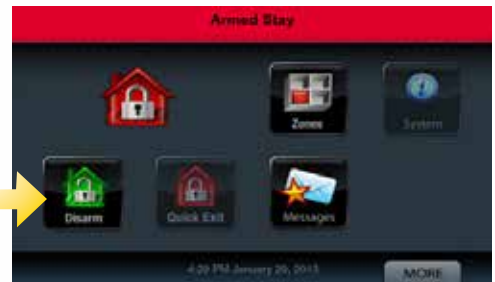

ADDING OR CHANGING CODES

1

From SECURITY screen, touch MORE icon

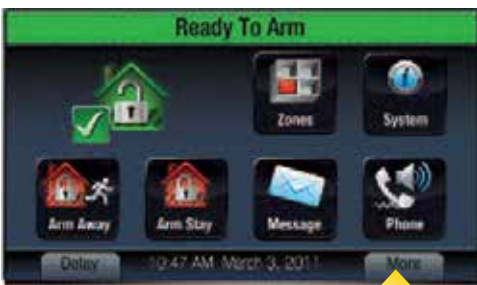

2

Touch TOOLS



3

Touch USERS, then enter master code (in CODE screen)



4

Touch EDIT or ADD NEW, follow prompts.

Press SAVE when finished.




Atronic Alarms, Inc., Lynx Touch 5100 System, Quick Reference

BYPASSING A ZONE


1

From SECURITY screen, touch the ZONES icon

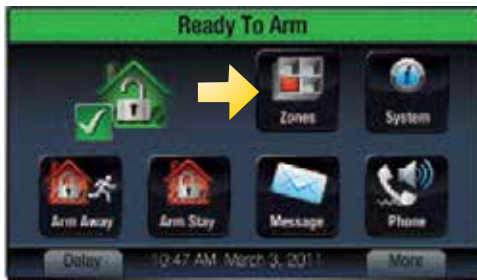

2

Zones will be listed and shown as ready, faulted or in trouble.

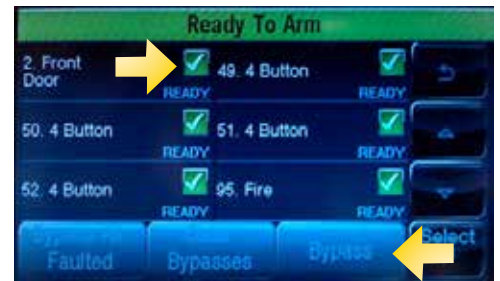

Use the ▼ or ▲ buttons to scroll.

Touch the zone you want bypassed and touch BYPASS. Enter code.

NOTE: All bypasses are removed automatically next time system is disarmed.

ADJUST DOOR CHIME, VOLUME AND VOICE

1

From SECURITY screen, touch the MORE icon



2

Touch SETTINGS



3

Touch the VOICE, CHIME or RINGER icon. This toggles between "off" and "on."



Touch SAVE to save your new settings.

ATRONIC ALARMS, INC.
LENEXA, KANSAS
913.362.0000
WWW.ATRONICALARMS.COM

Atronic Alarms, Inc., Lynx Touch 5100 System, Quick Reference

PANIC BUTTONS - IMMEDIATE DISPATCH!

1

From the HOME screen, touch bottom left button and hold for 3 seconds




2

Press and hold desired button for 2 seconds.

Press POLICE dispatches the police department.

Press FIRE dispatches the fire department.

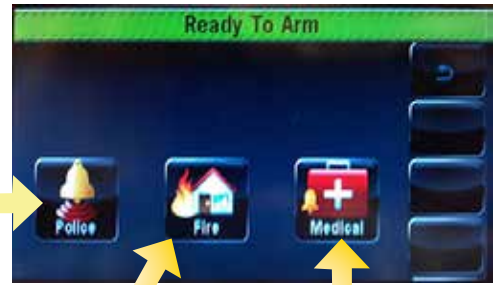

Press MEDICAL dispatches the Emergency Ambulance units

RESETTING SYSTEM AND CLEARING TROUBLES

1

If the system is showing a TROUBLE signal, touch the DISARM icon.



2

Enter code when disarm screen appears.

If trouble persists, please call the Atronic Alarms service department at 913.362.0000



TO CANCEL FALSE ALARMS

Available 24 hours a day - Call 913.432.4545
You may call this number after hours to reach our 24-hour emergency technical support technician.

Know Your Password.



**ATRONIC ALARMS, INC.
LENEXA, KANSAS
913.362.0000
WWW.ATRONICALARMS.COM**